

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	
	)	
<b>Dr. -Ing. Dieter Wendisch</b>	)	
	)	Art Unit: <b>Unknown</b>
Serial No. -----	)	
	)	Examiner: <b>Unknown</b>
Filed: <b>January 14, 2002</b>	)	
	)	
For: <b>A Method of and an Apparatus for</b>	)	
<b>Testing Connections in a Network</b>	)	

## PRELIMINARY AMENDMENT

Commissioner for Patents  
Washington, DC 20231

Sir:

Prior to examination of the above referenced application, kindly enter the following amendments and consider the appended remarks.

**In the Claims**

Please replace original claims 1, 2, 4-9, and 11-18 with the following claims of the same number:

1. (Once amended) A method of testing electronic signals in a network, comprising network units between which information can be exchanged by electronic data transmission through network connections, wherein a plurality of testing components are coupled each to one or more of the network connections so that the testing components each can detect electronic signals relating to the electronic data transmission through the one or more

**Express Mail Label No. EL 690 566 637 US**

network connections to which the respective testing component is coupled, the method comprising the following steps:

establishing a test connection for exchange of electronic signals, including test and/or control signals, between one of the testing components and at least another one of the testing components in response to a current testing task, the one testing component being coupled to one network connection and the at least one other testing component being coupled to another network connection in the network;

establishing a master-server configuration in response to the current testing task, the one testing component being configured as a master testing component and the at least one other testing component being configured as a server testing component;

automatically synchronizing in time the master testing component and the server testing component;

electronically initiating detection of current electronic test signals by the master testing component on the other network connection by means of the server testing component and allocating electronic time information to the detected current electronic test signals in automatic consideration of the previously accomplished time synchronization; and

processing the detected current electronic test signals and the allocated electronic time information by the server testing component and/or the master testing component in automatic consideration of the allocated electronic time information.

2. (Once amended) The method as claimed in claim 1, characterized in that another current testing task is carried out, upon termination of the current testing task, wherein another master-server configuration is established in response to the other current testing

task, the at least one other testing component being configured as a master testing component and the one testing component being configured as a server testing component.

4. (Once amended) The method as claimed in claim 1, characterized in that a synchronization connection for automatic synchronization in time is established between the master testing component and the server testing component for exchanging synchronization signals.

5. (Once amended) The method as claimed in claim 4, characterized in that synchronization signals transmitted from the master testing component to the server testing component comprise time standard signals so that the automatic synchronizing in time is released by the master testing component.

6. (Once amended) The method as claimed in any one of claim 1, characterized in that time standard signals transmitted via radio connections are received by the master testing component and/or the server testing component for automatic synchronizing in time.

7. (Once amended) The method as claimed in claim 1, characterized in that simulation signals are generated by means of the master testing component and fed into the network, in that electronic data of the simulation signals, including associated electronic simulation signal time information in response to the previously accomplished synchronizing in time, are stored in the master testing component, and in that the electronic data of the simulation signals stored in the master testing component are automatically taken into consideration in the processing of the current electronic test signals transmitted from the server testing component to the master testing component.

8. (Once amended) The method as claimed in claim 1, characterized in that further simulation signals are generated by means of the server testing component and fed into the network, in that electronic data of the further simulation signals, including associated electronic simulation signal time information in response to the previously accomplished synchronizing in time, are transmitted from the server testing component to the master testing component, and in that the electronic data of the further simulation signals transmitted from the server testing component to the master testing component are automatically taken into consideration in the processing of the current electronic test signals transmitted from the server testing component to the master testing component.

9. (Once amended) The method as claimed in claim 1, characterized in that electronic data of characteristics of the network are automatically taken into consideration in establishing the test connection and establishing the master-server configuration in response to the current testing task and/or in establishing the further master-server configuration in response to the further current testing task.

11. (Once amended) An apparatus for testing electronic signals in a network including network units between which information can be exchanged by electronic data transmission through network connections, the apparatus comprising

connecting means for coupling to one or more of the network connections;

interface means for establishing a test connection with at least one other testing apparatus in response to a current testing task for exchanging electronic data, including test and/or control signals, with the at least one other testing apparatus;

configuration means for establishing a master configuration or a server configuration with the at least one other testing apparatus in response to the current testing task;

synchronizing means for time synchronization with the at least one other testing apparatus;

detecting means for detecting current electronic test signals relating to an electronic data transfer through the one or more network connections;

allocating means for automatically allocating electronic time information to detected current electronic test signals in automatic consideration of the time synchronization with the at least one other testing apparatus;

transmitting means for transmitting detected current electronic test signals and the allocated electronic time information to the at least one other testing apparatus; and

processing means for processing the detected current electronic test signals and the allocated electronic time information.

12. (Once amended) The apparatus as claimed in claim 11, characterized by display means for electronic output of the current electronic test signals detected and/or the current electronic test signals processed by the processing means.

13. (Once amended) The apparatus as claimed in claim 11, characterized by a user interface for detection of user inputs and/or for the output of user data.

14. (Once amended) The apparatus as claimed in claim 11, characterized by receiving means for receiving time standard signals which are transmitted via radio connections.

15. (Once amended) A method as claimed in claim 1 wherein the network is a telecommunications network.

16. (Once amended) A method as claimed in claim 1 wherein the network is an energy supply net.

17. (Once amended) A method as claimed in claim 1 wherein the network is a network of traffic engineering systems.

18. (Once amended) A method as claimed in claim 1 wherein the network is a network of process engineering measurement/control systems.


#### REMARKS

After the foregoing preliminary amendment, the application includes claims 1-18. Claims 1, 2, 4-9, and 11-18 have been amended to eliminate multiple dependency and reference numerals.

Applicant respectfully claims the benefit of the filing dates of German Patent Application No. 10125382.6 filed in the German Patent Office on May 23, 2001 and German Patent Application No. 10103725.2 filed in the German Patent Office on January 26, 2001, under 35 U.S.C. § 119 for the above referenced U.S. Patent Application.

If there are any issues which can be resolved by a telephone conference or an Examiner's Amendment, the Examiner is invited to call the undersigned attorney at (404) 853-8064.

Respectfully submitted

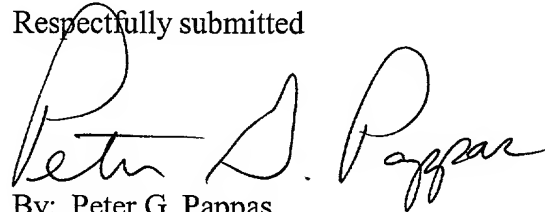

By: Peter G. Pappas  
Reg. No. 33205

Sutherland, Asbill & Brennan, LLP  
999 Peachtree Street, NE  
Atlanta, Georgia 30309-3996  
Telephone: (404) 853-8000  
Attorney Docket No. 17346-0003

### Claims 1, 2, 4-9, and 11-18

1. (Once amended) A method of testing electronic signals in a network, comprising network units between which information can be exchanged by electronic data transmission through network connections, wherein a plurality of testing components [TCI, TCII, TCIII] are coupled each to one or more of the network connections [(101, 102, 103)] so that the testing components [(TCI; TCII; TCIII)] each can detect electronic signals relating to the electronic data transmission through the one or more network connections [101, 102, 103)] to which the respective testing component is coupled, the method comprising the following steps:

establishing a test connection [(41)] for exchange of electronic signals, including test and/or control signals, between one of the testing components [(TCI)] and at least another one of the testing components [(TCII)] in response to a current testing task, the one testing component [(TCI)] being coupled to one network connection [(101)] and the at least one other testing component [(TCII)] being coupled to another network connection [(102)] in the network;

establishing a master-server configuration in response to the current testing task, the one testing component [(TCI)] being configured as a master testing component and the at least one other testing component being configured as a server testing component;

automatically synchronizing in time the master testing component [(TCI)] and the server testing component [(TCII)];

electronically initiating detection of current electronic test signals by the master testing component [(TCI)] on the other network connection [(102)] by means of the

server testing component [(TCII)] and allocating electronic time information to the detected current electronic test signals in automatic consideration of the previously accomplished time synchronization; and

processing the detected current electronic test signals and the allocated electronic time information by the server testing component [(TCII)] and/or the master testing component [(TCI)] in automatic consideration of the allocated electronic time information.

2. (Once amended) The method as claimed in claim 1, characterized in that another current testing task is carried out, upon termination of the current testing task, wherein another master-server configuration is established in response to the other current testing task, the at least one other testing component [(TCII)] being configured as a master testing component and the one testing component [(TCI)] being configured as a server testing component.

4. (Once amended) The method as claimed in claim 1, characterized in that a synchronization connection [(43)] for automatic synchronization in time is established between the master testing component [(TCI)] and the server testing component [(TCII)] for exchanging synchronization signals.

5. (Once amended) The method as claimed in claim 4, characterized in that synchronization signals transmitted from the master testing component [(TCI)] to the server testing component [(TCII)] comprise time standard signals so that the automatic synchronizing in time is released by the master testing component [(TCI)].

6. (Once amended) The method as claimed in any one of claim 1, characterized in that time standard signals transmitted via radio connections are received by the master testing



component [(TCI)] and/or the server testing component [(TCII)] for automatic synchronizing in time.

7. (Once amended) The method as claimed in claim 1, characterized in that simulation signals are generated by means of the master testing component [(TCI)] and fed into the network, in that electronic data of the simulation signals, including associated electronic simulation signal time information in response to the previously accomplished synchronizing in time, are stored in the master testing component [(TCI)], and in that the electronic data of the simulation signals stored in the master testing component [(TCI)] are automatically taken into consideration in the processing of the current electronic test signals transmitted from the server testing component [(TCI)] to the master testing component [(TCII)].

8. (Once amended) The method as claimed in claim 1, characterized in that further simulation signals are generated by means of the server testing component [(TCII)] and fed into the network, in that electronic data of the further simulation signals, including associated electronic simulation signal time information in response to the previously accomplished synchronizing in time, are transmitted from the server testing component [(TCII)] to the master testing component [(TCI)], and in that the electronic data of the further simulation signals transmitted from the server testing component [(TCII)] to the master testing component [(TCI)] are automatically taken into consideration in the processing of the current electronic test signals transmitted from the server testing component [(TCII)] to the master testing component [(TCI)].

9. (Once amended) The method as claimed in claim 1, characterized in that electronic data of characteristics of the network are automatically taken into consideration in

establishing the test connection [(41)] and establishing the master-server configuration in response to the current testing task and/or in establishing the further master-server configuration in response to the further current testing task.

11. (Once amended) An apparatus [(TCI, TCII, or TCIII)] for testing electronic signals in a network including network units between which information can be exchanged by electronic data transmission through network connections, the apparatus comprising

connecting means for coupling to one or more of the network connections [(101, 102, and 103, respectively)];

interface means for establishing a test connection [(40 or 41)] with at least one other testing apparatus in response to a current testing task for exchanging electronic data, including test and/or control signals, with the at least one other testing apparatus;

configuration means for establishing a master configuration or a server configuration with the at least one other testing apparatus in response to the current testing task;

synchronizing means for time synchronization with the at least one other testing apparatus;

detecting means for detecting current electronic test signals relating to an electronic data transfer through the one or more network connections;

allocating means for automatically allocating electronic time information to detected current electronic test signals in automatic consideration of the time synchronization with the at least one other testing apparatus;

transmitting means for transmitting detected current electronic test signals and the allocated electronic time information to the at least one other testing apparatus; and

processing means for processing the detected current electronic test signals and the allocated electronic time information.

12. (Once amended) The apparatus as claimed in claim 11, characterized by display means [(44, 45, and 46, respectively)] for electronic output of the current electronic test signals detected and/or the current electronic test signals processed by the processing means.

13. (Once amended) The apparatus as claimed in claim 11, characterized by a user interface [(50)] for detection of user inputs and/or for the output of user data.

14. (Once amended) The apparatus as claimed in [any one of claims] claim 11, characterized by receiving means for receiving time standard signals which are transmitted via radio connections.

15. (Once amended) [Use of a] A method as claimed in [any one of claims] claim 1 [to 10 and/or an apparatus as claimed in any one of claims 11 to 14 in] wherein the network is a telecommunications network.

16. (Once amended) [Use of a] A method as claimed in [any one of claims] claim 1 [to 10 and/or an apparatus as claimed in any one of claims 11 to 14 in] wherein the network is an energy supply net.

17. (Once amended) [Use of a] A method as claimed in [any one of claims] claim 1 [to 10 and/or an apparatus as claimed in any one of claims 11 to 14 in] wherein the network is a network of traffic engineering systems.

18. (Once amended) [Use of a] A method as claimed in [any one of claims] claim 1 [to 10 and/or an apparatus as claimed in any one of claims 11 to 14 in] wherein the network is a network of process engineering measurement/control systems.